


# BevPure XL Filter Cartridges

Extended Service Life through Asymmetric PES Membrane · Sterilizing Grade

**BevPure XL** Filter Cartridges have a unique membrane arrangement of single-layer asymmetric hydrophilic PES membrane. Characteristics include excellent throughput, high dirt holding capacity and durability. The extremely high flow rates in comparison to other sterilizing grade filter media can significantly reduce filtration costs.

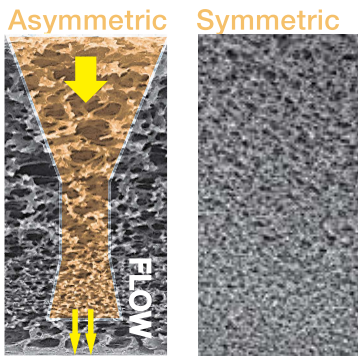

Trap/Pre-filtration

Microbiological Stabilization

Gas Filtration

Additional Filters

## Features and Benefits


- Highly asymmetric PES membrane provides high dirt holding capacity for longer service life
- Each filter is individually Integrity Tested prior to factory dispatch
- Available in ratings from 0.1µm to 1.2µm for precise bacteria and particle removal
- Complies with Food Contact Regulations: FDA 21CFR177-182 and 1935/2004 EC

## Materials of Construction

<b>Filter Media</b>	Asymmetric PES Membrane
<b>Cage/Support</b>	Polypropylene
<b>Core/End Caps</b>	Polypropylene

## Microbiological Stability

Longer life with highly asymmetric membrane

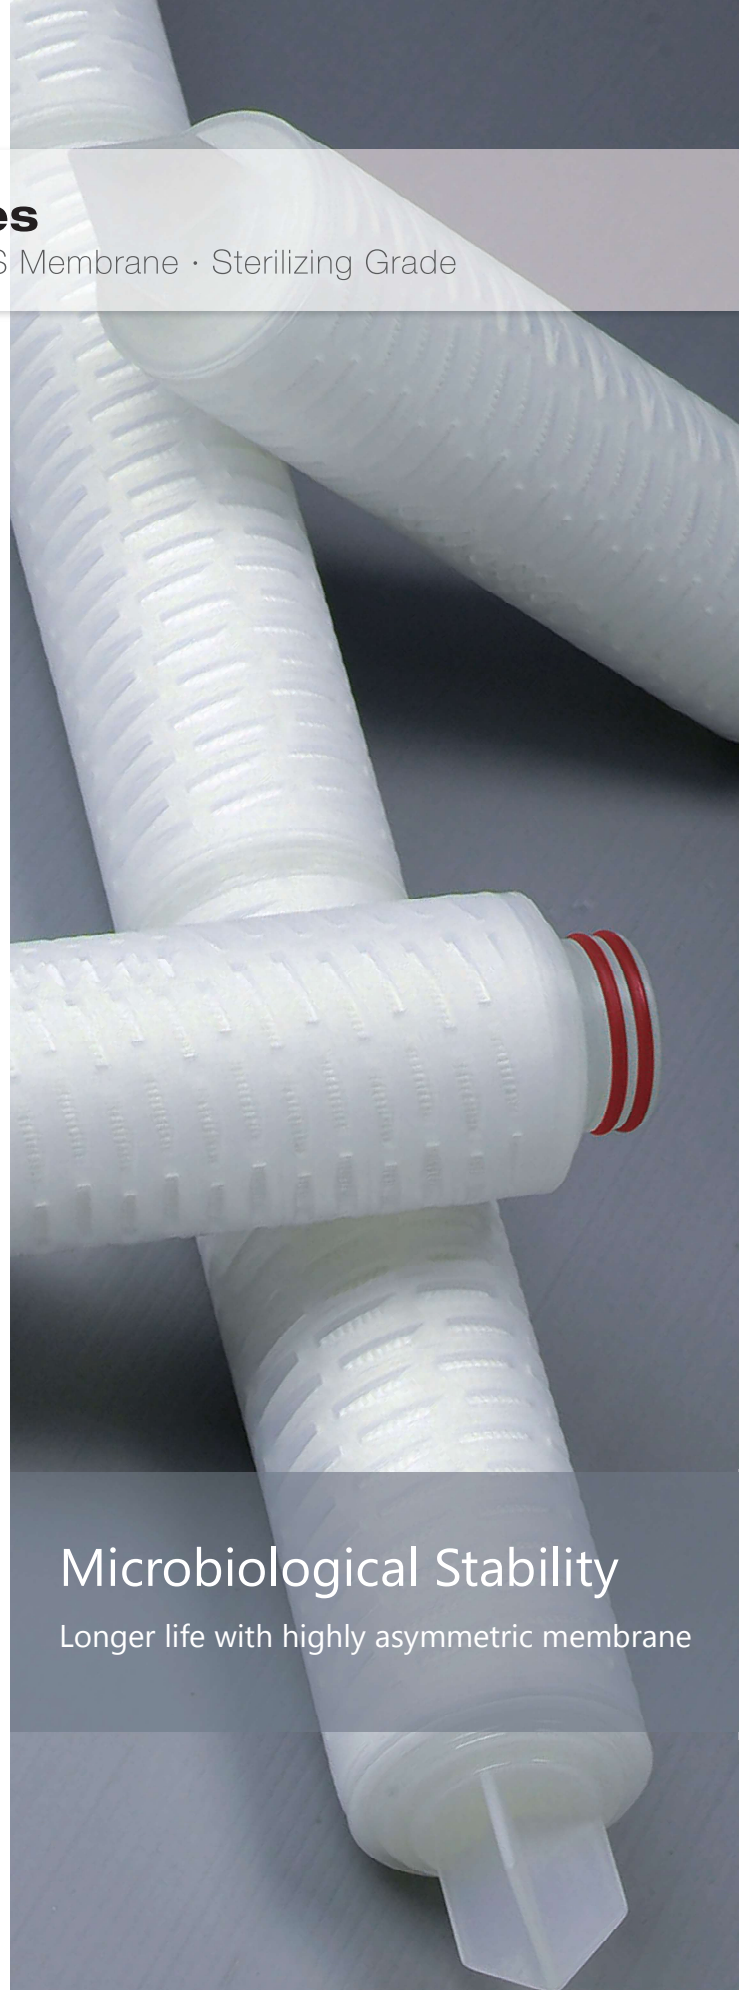



## Operating Conditions


<b>Maximum Operating Pressure</b>	6.9 bar (100 psi) at 25 °C 2.4 bar (35 psi) at 80 °C
<b>Max. Differential Pressure</b>	Forward 6.9 bar (100 psi) at 25 °C 2.4 bar (35 psi) at 80 °C Reverse 3.0 bar (44 psi) at 25 °C 1.0 bar (15 psi) at 80 °C
<b>Bubble Point (BPXLR)</b>	≥3.4 bar (49 psi) , air ,0.22µm ≤ 30 mL/min at 2.5 bar , water

### Sterilization

Inline Steam Sterilization: 100 cycles for 30 minutes at 135 °C (< 0.3 bar, 5 psi).  
 Autoclave: 200 cycles for 30 minutes at 130 °C.  
 Hot water sanitization: 50 cycles for 30 minutes at 85 °C  
 Chemistry sanitization: 50 cycles for 30 minutes at 40 °C in a mix solution of sodium hypochlorite (NaClO, 100 ppm) and peroxyacetic acid (100 ppm).

<b>Cleaning Solution</b>	2% NaOH Solution @ ≤65°C
<b>Effective Filtration Area</b>	0.58m <sup>2</sup> / Φ69-10 inch

## Flow Rate Characteristics

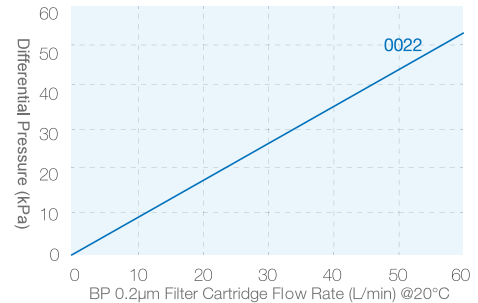

Flow Rate (LPM)	10	20	30	40	50	60
Differential Pressure (kPa)	9.2	18.5	27.7	37.0	46.2	55.5

## Reliable Microbiological Control

The primary purpose of a membrane filter cartridge in beverage processing is to effectively control spoilage microorganisms.

Typical Log Reduction Value (LRV)			
	<i>B.diminuta</i>	<i>Lactobacillus Brevis</i>	<i>Sasharomyces Cerevisiae</i>
0.2µm	>7/cm <sup>2</sup>	N/A	N/A
0.45µm	N/A	>7/cm <sup>2</sup>	>7/cm <sup>2</sup>
0.65µm	N/A	>4/cm <sup>2</sup>	>7/cm <sup>2</sup>
0.8µm	N/A	N/A	>7/cm <sup>2</sup>
1.2µm	N/A	N/A	>7/cm <sup>2</sup>

Log Reduction Values are calculated using the following formula:  $LRV = \log_{10} \left( \frac{\text{total number of organisms entering the filter}}{\text{total number of organisms exiting the filter}} \right)$

## Ordering Information

BPXL		Removal Ratings	End Cap	Nominal Length	Seal Material	-F
[Φ69]	-R	0022=0.22 µm 0045=0.45 µm 0065=0.65 µm 0080=0.8 µm 0120=1.2 µm	DOE=Double Open End HTC=222 O-ring/Flat (PBT Insert) HTF=222 O-ring/Fin (PBT Insert) HSF=226 O-ring/Fin (PBT Insert) SSF=226 O-ring/Fin (SS Insert) SSC=226 O-ring/Flat (SS Insert) STF=222 O-ring/Fin (SS Insert, 3 Tabs)	05=5" 10=10" 20=20" 30=30" 40=40"	S=Silicone E=EPDM V=Viton	

Distributed by



ENFISO GmbH | Weinbergstrasse 4 | 8447 Dachsen | +41 76 405 50 82 | info@enfiso.ch | www.enfiso.ch



Food & Beverage Industry  
Filtration Solutions